"Radiofrequency thermolesion allows the elimination or at least considerable reduction of chronic pain. This gives the body the chance to recover through self-healing."

Maximum user-friendliness



Intuitive operation enables safe and fast use in the OR. Convenient control via touchscreen with a clear user interface – easy setting of parameters via swiping.



Storage of up to 20 application profiles per application for predefined interventions or user settings.



Audio impedance allows impedance values to be output as pitches, making it easier to detect changes.



Neutral Electrode Monitoring detects whether the neutral electrode has optimal contact with the patient's skin. This minimises the risk of skin burns.



The remote control allows control outside the sterile field

during the entire procedure.

Continuous temperature and impedance measurement

during the intervention. Clear graphical display of all

relevant parameters during the application.

Patient database for documentation of the procedures.

Export of detailed treatment protocols to USB stick for

evaluation. Screenshot function for easy documentation.





Online ordering tool for accessories

Please visit our webshop to get an overview of our instruments.

We look forward to receiving your order:

For further product information visit:

shop.inomed.com

www.inomed.com

LG1 RF Lesion Generator

1 channel generator

1 channel monopolar or 1 channel bipolar

Motor/sensory stimulation

Continuous radiofrequency: power-, temperature-controlled or step mode

LG2 RF Lesion Generator

2 channel generator

2 channels monopolar, 2 channels monopolar as bipolar, 1 channel bipolar Motor/sensory stimulation

Continuous radiofrequency: power-, temperature-controlled or step mode Pulsed radiofrequency: temperature-, voltage- or pulse width-controlled

Art. No. 262000

LG4 RF Lesion Generator

4 channel generator

up to 4 channels monopolar, 1 channel bipolar

Motor/sensory stimulation

Continuous radiofrequency: power-, temperature-controlled or step mode Pulsed radiofrequency: temperature-, voltage- or pulse width-controlled

Art. No. CR2020G

Pulsed radiofrequency: temperature-, voltage- or pulse width-controlled

Art. No. 261000





Im Hausgruen 29 79312 Emmendingen (GERMANY) Tel. +49 7641 9414-0

Fax +49 7641 9414-94 info@inomed.com www.inomed.com

LG4 RF Lesion Generator for pain treatment



Intuitive operation, various applications, protection by Neutral Electrode Contact Quality Monitoring, variety of accessories







Everything in view due to optimal positioning in the OR

The light weight as well as the compact and modern design of the LG4 allow flexible use in the surgical environment and in the treatment room.

Safe placement on the trolley gives you an optimal view of the important parameters. Thanks to a clear and large display, values are very easy to read even at a greater distance.

LG4 Radiofrequency Lesion Generator

Wide range of applications and lesion configurations

LG4 – The next level of pain treatment

The next level of RF lesion generators.

The LG4 Lesion Generator provides new opportunities and comfort in pain treatment interventions that you have not experienced before.

radiofrequency.

configurations

High power output


With 100 watts, the RF Lesion Generator ensures a well-formed lesion for all interventions.

Keep the control

The LG4 Lesion Generator can be controlled during all situations via touchscreen, remote control or foot switch.

Independent channels

Each channel can be configured with individual parameter settings.

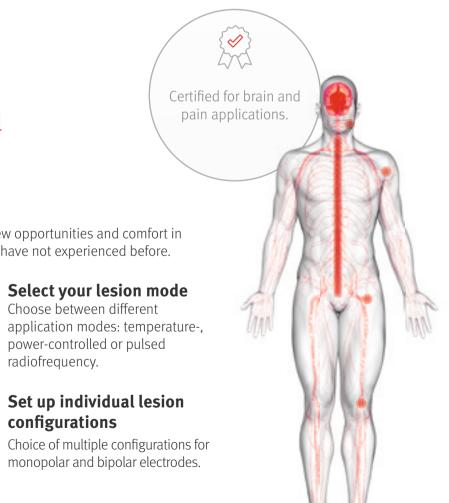

Benefit from the wide range of application possibilities, for example:

Head and neck

- > Occipital neuralgia
- > Trigeminal neuralgia

Spine

- > Dorsal root ganglion
- Facet joints (lumbar, thoracic, cervical spine)
- > Sacroiliac joint

Extremities

- > Knee
- > Heel spur

Others

- > Shoulder
- > Hip
- > and other applications

The choice is yours: The LG4 offers the right lesion configuration for your intervention

Monopolar 1;2;3;4 channels



2 monopolar; 2 monopolar as bipolar 1; 2+3; 4 channels



Monopolar as bipolar 1+2; 3+4 channels



1 channel



Extensive product portfolio

Remote control

Cable connection 2.5 m to LG2 with 4 pole Redel male connector grey, with 4 buttons for controlling LG4 functions

non-autoclavable

Art. No. BE1022A

Foot switch

Cable connection 2 m to LG4 with 3 buttons for controlling LG4 functions

Art. No. BE1023B

Test plug

Plug for terminating the channels for the self-test

Art. No. 262003

Trolley

Floor element with 4 wheels, front wheels with brakes and drawer for accessories

Art. No. 262300

Connection cables for LG4

Connection cable SuperLight

- delivered non-sterile
- autoclavable Art. No. 262004





TC cable 3 m to LG4 with 6 pole Redel male connector grey and 4 pole SuperLight connector for TC electrodes

 autoclavable Art. No. 262007

Connection cable Lemosa

for TC electrodes (Lemosa)

• delivered non-sterile

TC cable 3 m to LG4 with 6 pole Redel male

connector grey and 7 pole Lemosa connector

Connection cable single use electrode

TC cable to LG4 with 6 pole Redel male connector grey and connector for disposable TC electrodes

- delivered non-sterile
- · wipe-disinfectable

Art. No. 262008